



CERTIFICATION OF TRANSLATION

I, **KIM, So Hee**, an employee of Y.P. LEE, MOCK & PARTNERS of The Cheonghwa Bldg., 1571-18 Seocho-dong, Seocho-gu, Seoul, Republic of Korea, hereby declare under penalty of perjury that I understand the Korean language and the English language; that I am fully capable of translating from Korean to English and vice versa; and that, to the best of my knowledge and belief, the statements in the English language in the attached translation of **the Korean Patent Application No. 1999-0009528, Method of progressively coding/decoding 3-D mesh information and apparatus thereof** consisting of **26** pages, have the same meanings as the statements in the Korean language in the original document, a copy of which I have examined.

Signed this 19th day of July, 2004

A handwritten signature in cursive script that reads "Sohee Kim".

KIM, So Hee

RECEIVED

JUL 27 2004

Technology Center 2600

A B S T R A C T

[Abstract of the Disclosure]

A method of progressively coding/decoding 3-D mesh information, and an apparatus therefor are provided. The progressive 3-D mesh information coding method includes the steps of (a) reconstructing an input 3-D mesh into a plurality of mesh components, (b) coding each of the plurality of mesh components, and (c) multiplexing the plurality of coded mesh components into a compressed bit stream and transmitting the compressed bit stream. The method of progressively decoding the transmitted, compressed bit stream which has been coded by the coding method, includes (a) dividing the transmitted bit stream into a plurality of coded mesh components, (b) decoding each of the plurality of coded mesh components, and (c) reconstructing a 3-D mesh by synthesizing the plurality of decoded mesh components.

[Representative Drawing]

FIG. 3

S P E C I F I C A T I O N

[Title of the Invention]

Method of progressively coding/decoding 3-D mesh information and apparatus thereof

[Brief Description of the Drawings]

FIG. 1 is a conceptual block diagram illustrating a conventional 3-D mesh information coding/decoding method;

FIG. 2 is a conceptual block diagram illustrating the structure of progressive 3-D mesh information according to the present invention;

FIG. 3 is a conceptual block diagram illustrating a progressive 3-D mesh information coding/decoding method according to a preferred embodiment of the present invention;

FIG. 4 is a block diagram illustrating a preferred embodiment of the 3-D data analyzer shown in FIG. 3;

FIG. 5 is a conceptual block diagram illustrating a progressive 3-D mesh information coding/decoding method according to another preferred embodiment of the present invention;

FIG. 6 is a block diagram of FIG. 5 to which a 3-D MOL synthesizer is added;

FIG. 7 is a conceptual block diagram illustrating a progressive 3-D mesh information coding/decoding method according to still another preferred embodiment of the present invention;

FIG. 8 is a block diagram of FIG. 7 to which a 3-D data synthesizer is added;

FIG. 9 illustrates an example of a simple 3-D mesh object (MO) comprised of one mesh object layer (MOL), to facilitate understanding of the present invention; and

FIG. 10 illustrates an example of three mesh components (MCOM0 through MCOM2) into which the mesh object layer (MOL) shown in FIG. 9 is divided;

In FIG. 11, (a) through (c) illustrate examples of information included in mesh components MCOM0 through MCOM2 into which a mesh object layer (MOL) is divided; and

In FIG. 12, (a) through (c) illustrate examples of a method of processing information shared by two mesh components.

[Detailed Description of the Invention]

[Object of the Invention]

[Technical Field of the Invention and Related Art prior to the Invention]

The present invention relates to coding/decoding of 3-D mesh information, and more particularly, to a progressive coding/decoding method for 3-D mesh information which is used in the field of moving picture expert group (MPEG)-4 synthetic and natural hybrid coding (SNHC) and a virtual reality modeling language (VRML), and an apparatus thereof.

Not only efficient coding of mesh data but also progressive reconstruction of transmitted mesh data is recognized as an important requisite for transmission of a 3-D object including 3-D mesh. When mesh data is damaged by a communications line error during transmission, part of the damaged mesh data can be reconstructed with already-transmitted mesh data by a progressive reconstruction technique. Thus, the amount of mesh data to be retransmitted is minimized. This progressive reconstruction technique is expected to be effectively used in future wireless communications or communications at a low transmission rate, since this technique has strong characteristics with respect to communications line errors.

FIG. 1 is a conceptual block diagram of a conventional 3-D mesh information coding/decoding apparatus. Referring to FIG. 1, a coding unit 101 is comprised of a connectivity information coder 102, a geometry information coder 103, and an entropy coder 104, and a decoding unit 112 is comprised of an entropy decoder 106, a connectivity information decoder 107, and a geometry information decoder 108.

A conventional method of compressing 3-D mesh data, which is used in MPEG, will now be described referring to FIG. 1. 3-D mesh data 100 input to the coding unit 101 includes connectivity information and geometry information, and the two types of information are coded respectively by the connectivity information coder 102 and the geometry information coder 103. Here, information 105 on a vertex structure is transmitted from the connectivity information coder 102 to the geometry information coder 103. Information compressed by the connectivity information

coder 102 and the geometry information coder 103 is converted into a compressed bit stream 111 by the entropy coder 104.

The compressed bit stream 111 is input to the decoding unit 112 and decoded as follows. The compressed bit stream 111 is divided into connectivity information and geometry information via the entropy decoder 106, and the two types of information are decoded by the connectivity information decoder 107 and the geometry information decoder 108, respectively. Similar to the coding unit 101, information 109 on a vertex structure is transmitted from the connectivity information decoder 107 to the geometry information decoder 108. A reconstructed 3-D mesh 110 can be obtained by decoded connectivity information and decoded geometry information.

As shown in FIG. 1, a 3-D mesh is transmitted in the form of a compressed bit stream on a communications line. However, since the conventional method uses the entropy coder, it has poor resistance to transmission errors which may be generated in a communications line.

Since conventional coding with respect to 3-D mesh data is accomplished in units of the entire mesh data, it is almost impossible to perform partial reconstruction before the entire bit stream is transmitted upon transmission of coded data. Also, conventional 3-D mesh coding has an inefficiency problem in that even when a very small portion of data is damaged by an error of a communications line caused upon transmission, the entire mesh data must be transmitted again. For example, an encoding method (ISO/IEC JTC1/SC29/WG11 MPEG98/W2301, MPEG-4 SNHC Verification Model 9.0) proposed by the IBM company has been used for MPEG-4 SNHC 3-D mesh coding.

[Technical Goal of the Invention]

To solve the above problems, it is an object of the present invention to provide a progressive 3-D mesh information coding/decoding method by which partial classification and partial reconstruction are possible by reconstructing a model so that it can be processed in units of parts, so that progressive picture reproduction becomes possible through progressive decoding, and transmission errors are dealt with well, and an apparatus therefor.

It is another object of the present invention to provide a progressive 3-D mesh information coding/decoding method by which independent coding and decoding are possible by dividing a model into independent step meshes or mesh components, so that progressive picture reproduction becomes possible through progressive decoding, and transmission errors are dealt with well, and an apparatus therefor.

[Structure and Operation of the Invention]

Accordingly, to achieve the first object, the present invention provides a progressive 3-D mesh information coding method which includes the steps of: (a) reconstructing a 3-D mesh into a plurality of mesh components; (b) coding each of the plurality of mesh components; and (c) multiplexing the plurality of coded mesh components into a bit stream and transmitting the bit stream.

To achieve the first object, the present invention also provides a progressive 3-D mesh information decoding method which includes the steps of: (a) dividing the transmitted bit stream into a plurality of coded mesh components; (b) decoding each of the plurality of coded mesh components; and (c) reconstructing a 3-D mesh by synthesizing the plurality of decoded mesh components.

To achieve the first object, the present invention provides a progressive 3-D mesh information coding apparatus which includes: a 3-D data analyzer for reconstructing a 3-D mesh into a plurality of mesh components; a plurality of component coders for coding the plurality of mesh components; and a multiplexer for multiplexing the plurality of coded mesh components into a bit stream.

To achieve the first object, the present invention provides a progressive 3-D mesh information decoding apparatus which includes: a demultiplexer for dividing the transmitted bit stream into a plurality of coded mesh components; a plurality of component decoders for decoding the plurality of coded mesh components; and a 3-D data synthesizer for synthesizing the plurality of decoded mesh components to reconstruct a 3-D mesh.

To achieve the second object, the present invention provides another progressive 3-D mesh information coding/decoding method which includes the steps of: (a) extracting one or more independent mesh object layers from a 3-D mesh; (b) independently coding and transmitting the mesh object layers; and (c) obtaining one

or more independent mesh object layers by decoding the independently coded and transmitted mesh object layers, the method further comprising the step of (d) synthesizing the independent mesh object layers and removing redundant information to reconstruct the original 3-D mesh.

To achieve the second object, the present invention provides another progressive 3-D mesh information coding/decoding apparatus which includes: a 3-D mesh object layer analyzer for receiving a 3-D mesh and extracting one or more mesh object layers from the received 3-D mesh; one or more mesh object layer coders for independently coding and transmitting the mesh object layers; and one or more mesh object layer decoders for decoding the mesh object layers which have been independently coded and transmitted, to obtain one or more independent mesh object layers, the apparatus further including a 3-D mesh object layer synthesizer for synthesizing the independent mesh object layers and removing redundant information to reconstruct the original 3-D mesh.

To achieve the second object, the present invention provides a still another progressive 3-D mesh information coding/decoding method which includes the steps of: (a) extracting one or more mesh object layers from a 3-D mesh and dividing each mesh object layer into a plurality of independent mesh components; (b) independently coding and transmitting the plurality of mesh components; and (c) obtaining a plurality of independent mesh components by decoding the plurality of independently coded and transmitted mesh components, the method further comprising the step of (d) synthesizing the independent mesh components and removing redundant information between adjacent mesh components to reconstruct the original 3-D mesh.

To achieve the second object, the present invention provides a still another progressive 3-D mesh information coding/decoding apparatus which includes: a 3-D mesh object layer analyzer for receiving a 3-D mesh, extracting one or more mesh object layers from the received 3-D mesh, and dividing each mesh object layer into a plurality of independent mesh components; a plurality of mesh component coders for independently coding and transmitting the plurality of mesh components; and a plurality of mesh component decoders for decoding the plurality of mesh components which have been independently coded and transmitted, to obtain a

plurality of independent mesh components, the apparatus further comprising a 3-D data synthesizer for synthesizing the plurality of independent mesh components and removing redundant information between adjacent mesh components to reconstruct the original 3-D mesh.

Preferred embodiments of the present invention will now be described with reference to the attached drawings.

FIG. 2 is a conceptual block diagram illustrating the structure of progressive 3-D mesh information according to the present invention.

The present invention proposes a new mesh structure as shown in FIG. 2, to deal with a progressive 3-D mesh. Referring to FIG. 2, the 3-D mesh object (MO) can be comprised of mesh object layers (MOLs) obtained by dividing information in the mesh into layers. Here, each MOL includes one or more mesh components (MCOM). One mesh component (MCOM) includes connectivity information, geometry information, and other information such as photometry information. That is, the MO is defined as a 3-D mesh object (MO) unit to be coded, and is classified into a plurality of layers according to the various image qualities and functions of the above-described mesh information. Each of the layers is defined as MOLs. When one 3-D MOL is comprised of several independent types of mesh information (that is, connectivity components) having no connectivity therebetween using a topological surgery method, independent mesh information is synthesized or divided according to the size of data to be coded and other characteristics, and the results are defined as MCOMs.

Referring to FIG. 3, a progressive 3-D mesh information coding/decoding apparatus according to a preferred embodiment of the present invention includes a coding unit 200 and a decoding unit 209. The coding unit 200 includes a 3-D data analyzer 201, a plurality of first through N-th component coders 202, and a multiplexer (MUX) 204. The decoding unit 209 includes a demultiplexer (DMUX) 205, a plurality of first through N-th component decoders 206, and a 3-D data synthesizer 208.

Referring to FIG. 3, first, a 3-D mesh object (MO) 100 is reconstructed into a plurality of mesh components (MCOM) by the 3-D data analyzer 201, and the plurality of mesh components are input to the plurality of first through N-th

component coders 202, respectively. Here, several mesh components (MCOM) can constitute an MOL. Each of the MCOMs is compressed by a corresponding component coder 202, and the compressed bit streams are multiplexed by the MUX 204 and transmitted. Here, MOL or MCOM information 203 used in an already-operated component coder can be used in a component coder not yet operated. For example, information 203 used in the first component coder which is an upper component coder, is also transmitted to a second component coder which is a lower component coder, and can be used therein.

The compressed bit stream transmitted to the decoding unit 209 is classified into MOLs, and each MOL is again divided into mesh components (MCOMs) by the DMUX 205. The mesh components are decoded by the plurality of first through N-th component decoders 206. Also in the decoding unit 209, information 207 generated by an already-operated component decoder is reused in a component decoder not yet operated. For example, information 207 generated by the first component decoder which is an upper component decoder, is transmitted to a second component decoder which is a lower component decoder. The decoded mesh components (MCOMs) are reconstructed by the 3-D data synthesizer 208 into a 3-D mesh 110.

When the 3-D MO is first classified into one or more MOLs and then divided into MCOMs, the 3-D data analyzer 201 can be constituted as shown in FIG. 4.

Referring to FIG. 4, a preferred embodiment of the 3-D data analyzer 201 of FIG. 3 includes a 3-D MOL analyzer 301 and a plurality of first through n-th MCOM analyzers 303.

When the 3-D MO 100 is input to the 3-D data analyzer 300, the 3-D MOL analyzer 301 extracts MOL1 through MOLn 302 from the input 3-D MO. Then, the extracted MOL1 through MOLn 302 are each divided into mesh components 304 by the first through n-th MCOM analyzers 303. The mesh components 304 are output from the data analyzers. Each mesh component 304 is input to a corresponding component coder among (1-1)th through (1-m)th component coders, (2-1)th through (2-m) component coders, etc.

Each of the MCOM analyzers uses information generated by its upper MCOM analyzer, and the component coders for one MCOM analyzer uses information

generated by an above component coder corresponding to the same MCOM analyzer. However, information 305 used in an arbitrary MCOM analyzer may not be used in another MCOM analyzer. In this case, an independent mesh object layer information coding/decoding method can be performed in a structure shown in FIG. 5.

Referring to FIG. 5, a progressive 3-D mesh information coding/decoding apparatus according to another embodiment of the present invention includes a 3-D MOL analyzer 401, and a plurality of first through n-th independent coders/decoders 403.

In this embodiment shown in FIG. 5, information generated by any one coder is not used in the other coders. That is, after MOL1 through MOLn 402 are generated from the 3-D mesh object (MO) 100 by the 3-D MOL analyzer 401, they are compressed, transmitted, decoded and reconstructed respectively by the independent coders/decoders 403. Here, each of the coders and decoders includes an MCOM analyzer, so that each can divide a MOL into MCOMs and code/decode them. Information 404 decoded by the decoders is independent MOL data, so a 3-D mesh 405 is reconstructed by simply collecting this information. However, in this case, the reconstructed 3-D mesh 405 also includes extra information which was generated when the 3-D MOL analyzer 401 classified the 3-D mesh object (MO) 100 into the MOL1 through MOLn 402.

Referring to FIG. 6, the preferred embodiment shown in FIG. 5 further includes a 3-D MOL synthesizer 406. The 3-D MOL synthesizer 406 is added to obtain a reconstructed 3-D mesh 110 which is the same as the original 3-D mesh MO 100 by removing the additional information included in the reconstructed 3-D mesh 405. The 3-D MOL synthesizer 406 collects information 404 decoded by the decoders and removes redundant information, thereby reconstructing the original 3-D mesh 110.

Meanwhile, the component coders in FIG. 4 share information, but information 306 used in one component coder may not be used in the other component coders. In this case, an independent component mesh information coding/decoding method can be performed in a structure shown in FIG. 7.

Referring to FIG. 7, a progressive 3-D mesh information coding/decoding apparatus according to still another embodiment of the present invention includes a 3-D data analyzer 501, and a plurality of first through n-th independent MCOM coders/decoders 503.

In the embodiment shown in FIG. 7, information used in an already-operated coder will not be used in a coder not yet operated. That is, the 3-D mesh MO 100 is divided into mesh components MCOM1 through MCOMn 502 by the 3-D data analyzer 501 which includes a 3-D MOL analyzer and a plurality of MCOM analyzers, and the mesh components 502 are then compressed, transmitted, decoded and reconstructed by the independent first through n-th MCOM coders/decoders 503, respectively. Information 504 decoded by the decoders is independent mesh component data, so reconstruction of a 3-D mesh 505 is accomplished by simply collecting this data. However, when the 3-D data analyzer 501 divides one mesh object layer into a plurality of mesh components, the mesh components share boundary information such as an edge, the attributes of the coordinates of points, or those of the units of points. Thus, much redundant information exists in the reconstructed 3-D mesh 505.

Referring to FIG. 8, still another preferred embodiment shown in FIG. 7 further includes a 3-D data synthesizer 506. The 3-D data synthesizer 506 is added as shown in FIG. 8 to increase coding efficiency by removing redundant information included in the reconstructed 3-D mesh 505. The 3-D data synthesizer 506 collects information 504 decoded by the decoders and removes redundant information, thereby reconstructing the original 3-D mesh 110.

FIG. 9 illustrates an example of a simple 3-D MO comprised of one MOL to facilitate understanding of the present invention. FIG. 10 illustrates an example in which the 3-D MOL shown in FIG. 9 is divided into three mesh components (MCOM0 through MCOM2). Information (e.g., an edge, the coordinates of points, the attributes of point units, etc.) corresponding to the boundary portion is shared by adjacent mesh components. Accordingly, the next mesh component can be decoded/coded by reusing some or all of the information generated while a mesh component is decoded/coded.

In FIG. 11, (a) through (c) illustrate examples of information included in each mesh component when an MOL is divided into mesh components MCOM0 through MCOM2.

In FIG. 11, (a) shows the sharing of information in the boundary portion between mesh components when an MOL is divided into mesh components MCOM0 through MCOM2. Some or all of information existing in the boundary portion is copied, so that adjacent mesh components can share the same information. In FIG. 11, (b) shows mesh components MCOM0 through MCOM2 each having information shared by adjacent mesh components. When the redundancy of shared information in each mesh component is allowed as shown in (b) of FIG. 11, all of the mesh components can be independently processed, but compression efficiency is degraded.

Meanwhile, in FIG. 11, (c) shows mesh components MCOM0 through MCOM2 when only a mesh component to be first coded has information shared by adjacent mesh components. When there is information shared by an already-coded mesh component, information generated by the already-coded mesh component is used for a mesh component not yet coded, so that no redundant information is generated. However, the respective mesh components are not independently processed.

In FIG. 12, (a) through (c) illustrate examples of a method of processing information shared by two mesh components.

In FIG. 12, (a) shows two mesh components which are separated independently. Here, the two mesh components share information such as the same sides, the same points and the attributes of the points. Each type of information is copied to two mesh components, and the two mesh components are separated and then independently processed. While the two mesh components are processed, information copied to each mesh component is considered to be different. Hence, when information independently decoded by a decoding portion is collected and used to reconstruct a mesh object layer, the original MOL is transformed, and consequently, the size of a file increases. Referring to FIG. 5 or 7, independent mesh components as shown in (a) of FIG. 12 are independently processed by independent coders/decoders.

In FIG. 12, (b) shows two mesh components which are not completely separated from each other but only part of the shared information is redundantly coded. A preceding mesh component has all of the shared information, but the next mesh component has only part of the shared information, that is, information on the same points as those of the preceding mesh component. In this case, the same shared point is defined by each of two or more mesh components, but the same point in each is recognized as an identical point. Thus, the original MOL is kept after the mesh components are restored. Also, when the preceding mesh component has not been restored, the boundary portion between the preceding mesh component and the next mesh component can be restored due to restoration of the next mesh component. Referring to FIG. 3, when information generated by an already-operated component coder is used in a component coder not yet operated, the information is part of the shared information. The component coder not yet operated redundantly codes information on the same points shared by the already-operated component coder.

In FIG. 12, (c) shows an example where only a preceding mesh component has shared information, and the next mesh component uses all of information generated by the preceding mesh component. In this case, no information is redundantly coded, so that compression efficiency is increased. However, since each mesh component is not independent, it is impossible to restore the boundary portion due to restoration of the next mesh component when the preceding mesh component is not restored. Referring to FIG. 3, when information generated by an already-operated component coder is used in a component coder not yet operated, the information corresponds to the whole of shared information. The component coder not yet operated does not redundantly code all information shared by the already-operated component coder.

A grammar table of ISO/IEC JTC1/SC29/WG11 MPEG-4 SNHC 3-D mesh coding, for accomplishing coding of progressive 3-D mesh information according to the present invention is as follows.

► **3D_Mesh_Object**

MO_start_code: This is a unique 16-bit code which is used for synchronization. The value of this code is always '0000 0000 0010 0000'.

► **3D_Mesh_Object_Layer**

MOL_start_code: This is a unique 16-bit code which is used for synchronization. The value of this code is always '0000 0000 0011 0000'.

mol_id: This unsigned 8-bit integer indicates a unique identifier for the mesh object layer (MOL). A value of 0 indicates a base layer, and a value larger than 0 indicates a refinement layer. The first 3D_Mesh_Object_Layer immediately behind a 3D_Mesh_Object_Header must have mol_id=0, and subsequent 3D_Mesh_Object_Layers within the same 3D_Mesh_Object must have mol_id>0.

N_Vertices denotes the number of vertices in the current resolution of the 3-D mesh, which is used to reduce the number of calculations.

N_Triangles denotes the number of triangles in the current resolution of the 3-D mesh, which is used to reduce the number of calculations.

N_Edges denotes the number of edges in the current resolution of the 3-D mesh, which is used to reduce the number of calculations.

► **3D_Mesh_Object_Base_Layer**

MOBL_start_code: This is a unique 16-bit code which is used for synchronization. The value of this code is always '0000 0000 0011 0001'.

mol_id: This 8-bit unsigned integer which indicates a unique identifier for the mesh object component (MCOM).

last_component: This boolean value indicates if there are more connected components to be decoded. If last_component is true, then the last component has been decoded. Otherwise, there are more components to be decoded. This field is arithmetically coded.

► **3D_Mesh_Object_Header**

ccw: This boolean value indicates if the vertex ordering of the decoded faces follows a counterclockwise order.

convex: This boolean value indicates if the model is convex.

solid: This boolean value indicates if the model is solid.

creaseAngle: This 6-bit unsigned integer indicates the crease angle.

► **coord_header**

coord_binding: This 2-bit unsigned integer indicates binding of vertex coordinates to the 3-D mesh. The only admissible value is '01'.

coord-bbox: This boolean value indicates whether a bounding box is provided for the geometry. If no bounding box is provided, a default is used.

coord_xmin, coord_ymin, and coord-zmin: These floating-point values indicate the lower left corner of the bounding box having geometry.

coord_size: This floating-point value indicates the size of the bounding box.

coord_quant: This 5-bit unsigned integer denotes the quantization step used for geometry.

coord_pred_type: This 2-bit unsigned integer denotes the type of prediction used to reproduce the vertex coordinates of the mesh.

[Table 1]

coord_pred_type	prediction type
00	no prediction
01	invalid
10	parallelogram prediction
11	polygon prediction

coord_nlambda: This 2-bit unsigned integer denotes the number of ancestors used to predict geometry. Admissible values of **coord_nlambda** are 1 and 3. Table 2 shows admissible values as a function of **coord_pred_type**.

[Table 2]

coord_pre_type	coord_nlambda
00	1
01	invalid
10	3
11	1

coord_lambda: This unsigned integer indicates the weight given to an ancestor for prediction. The number of bits used for this field is equal to coord_quant+3.

► **normal_header**

normal_binding: This 2-bit unsigned integer indicates the binding of normals to the 3D mesh. The admissible values are described in Table 3.

[Table 3]

normal_binding	binding
00	no normals are coded
01	one normal is coded per vertex
10	one normal is coded per face
11	one normal is coded per corner

normal_bbox: This boolean value should always be false ('0').

normal_quant: This 5-bit unsigned integer indicates the quantization step used for normals.

normal_pred_type: This 2-bit unsigned integer indicates how normal values are predicted.

[Table 4]

normal_pred_type	prediction type
00	no prediction
01	tree prediction
10	parallelogram prediction
11	invalid

[Table 5]

--	--

normal_binding	normal_pred_type
00	ignored
01	10
10	01
11	01

normal_nlambda: This 2-bit unsigned integer indicates the number of ancestors used to predict normals. Admissible values of normal_nlambda are 1 and 3. Table 6 shows admissible values as a function of normal_pred_type.

[Table 6]

normal_pred_type	normal_nlambda
00	1
01	1
10	3
11	1

normal_lambda: This unsigned integer indicates the weight given to an ancestor for prediction. The number of bits used for this field is equal to normal_quant+3.

► **color_header**

color_binding: This 2-bit unsigned integer indicates the binding of colors to the 3D mesh. The admissible values are described in Table 7.

[Table 7]

color_binding	binding
00	no colors are coded
01	one color is coded per vertex

10	one color is coded per face
11	one color is coded per corner

color_bbox: This boolean value indicates if a bounding box for colors is given.

color_rmin, color_gmin and color_bmin: These floating point values give the position of the lower left corner of the bounding box in RGB space.

color_size: This floating point value gives the size of the color bounding box.

color_quant: This 5-bit unsigned integer indicates the quantization step used for colors.

color_pred_type: This 2-bit unsigned integer indicates how colors are predicted.

[Table 8]

color_pred_type	prediction type
00	no prediction
01	tree prediction
10	parallelogram prediction
11	invalid

[Table 9]

color_binding	color_pred_type
00	ignored
01	10
10	01
11	01

color_nlambda: This 2-bit unsigned integer indicates the number of ancestors used to predict colors. Admissible values of **color_nlambda** are 1 and 3. Table 10 shows admissible values as a function of **color_pred_type**.

[Table 10]

color_pred_type	color_nlambda
00	1
01	1
10	3
11	1

color_lambda: This unsigned integer indicates the weight given to an ancestor for prediction. The number of bits used for this field is equal to **color_quant**+3.

► **texCoord_header**

texCoord_binding: This 2-bit unsigned integer indicates the binding of textures to the 3D mesh. The admissible values are described in Table 11.

[Table 11]

texCoord_binding	binding
00	no textures are coded
01	one texture is coded per vertex
10	one texture is coded per face
11	one texture is coded per corner

texCoord_bbox: This boolean value indicates if a bounding box for textures is given.

texCoord_umin and **texCoord_vmin:** These two floating point values give the position of the lower left corner of the bounding box in 2D space.

texCoord_size: This floating point value gives the size of the texture bounding box.

texCoord_quant: This 5-bit unsigned integer indicates the quantization step used for textures.

texCoord_pred_type: This 2-bit unsigned integer is always '10' if texCoord_binding is '01', and '01' otherwise.

texCoord_nlambda: This 2-bit unsigned integer indicates the number of ancestors used to predict textures. Admissible values of texCoord_nlambda are 1 and 3. Table 12 shows admissible values as a function of texCoord_pred_type.

[Table 12]

texCoord_pred_type	texCoord_nlambda
00	1
01	1
10	3
11	1

texCoord_lambda: This unsigned integer indicates the weight given to an ancestor for prediction. The number of bits used for this field is equal to texCoord_quant+3.

► **Cgd_header**

N-Proj_Surface_Spheres is the number of Projected Surface Spheres. Typically, this number is equal to 1.

x_coord_Center_Point is the x-coordinate of the center point (typically the gravity point of the object) of the Projected Surface Sphere.

y_coord_Center_Point is the y-coordinate of the center point (typically the gravity point of the object) of the Projected Surface Sphere.

z_coord_Center_Point is the z-coordinate of the center point (typically the gravity point of the object) of the Projected Surface Sphere.

Normalized_Screen_Distance_Factor indicates where the virtual screen is placed, in relation to the radius of the projected surface sphere. The distance between the center point of the projected surface sphere and the virtual screen is equal to $\text{Radius}/(\text{Normalized_Screen_Distance_Factor}+1)$. Note that Radius is specified for each Projected Surface Sphere, while Normalized_Screen_Distance_Factor is specified only once.

Radius is the radius of the Projected Surface Sphere.

Min_Proj_Surface is the minimal projected surface value on the corresponding Projected Surface Sphere. This value is often (but not necessarily) equal to one of the Proj_Surface values.

N_Proj_Points is the number of points on the Projected Surface Sphere in which the projected surface will be transmitted. For all other points, the projected surface is determined by linear interpolation. N_Proj_Points is typically small (e.g., 20) for the first Projected Surface Sphere and very small (e.g., 3) for additional Projected Surface Spheres.

Sphere_Point_Coord indicates the index of the point position in an octahedron.

Proj_Surface is the projected surface in the point specified by Sphere_Point_Coord.

► **vertex_graph**

vg_simple: This boolean value indicates if the current vertex graph is simple. A simple vertex graph does not contain any loops. This field is arithmetically coded.

vg_last: This boolean value indicates if the current run is the last run starting from the current branching vertex. This field is not coded for the first run of each branching vertex, i.e., when the skip_last variable is true. When not coded the value of vg_last for the current vertex run is considered to be false. This field is arithmetically coded.

vg_forward_run: This boolean flag indicates if the current run is a new run. If it is not a new run, it must be a run previously traversed, indicating a loop in the graph. This field is arithmetically coded.

vg_loop_index: This unsigned integer indicates the index of the current run to which the current loop is connected. Its unary representation (see Table 13) is arithmetically coded. If the variable openloops is equal to vg_loop_index, the trailing '1' in the unary representation is omitted.

[Table 13]

vg_loop_index	unary representation
0	1
1	01
2	001
3	0001
4	00001
5	000001
6	0000001
...	
openloops-1	openloops-1 0's

vg_run_length: This unsigned integer indicates the length of the current vertex run. Its unary representation (see FIG. 14) is arithmetically coded.

[Table 14]

vg_run_length	unary representation
1	1
2	01
3	001
4	0001

5	00001
6	000001
7	0000001
8	00000001
n	n-1 0's followed by 1

vg_leaf: This boolean flag indicates if the last vertex of the current run is a leaf vertex. If it is not a leaf vertex, it is a branching vertex. This field is arithmetically coded.

vg_loop: This boolean flag indicates if the leaf of the current run connects to a branching vertex of the graph, indicating a loop. This field is arithmetically coded.

► **triangle_tree**

tt_run_length: This unsigned integer indicates the length of the current triangle run. Its unary representation (see Table 15) is arithmetically coded.

[Table 15]

tt_run_length	unary representation
1	1
2	01
3	001
4	0001
5	00001
6	000001
7	0000001
8	00000001
n	n-1 0's followed by 1

tt_leaf: This boolean flag indicates if the last triangle of the current run is a leaf triangle. If it is not a leaf triangle, it is a branching triangle. This field is arithmetically coded.

triangulated: This boolean value indicates if the current component contains triangles only. This field is arithmetically coded.

marching_triangle: This boolean value is determined by the position of the triangle in the triangle tree. The value marching_triangle=0 if the triangle is a leaf or branching triangle, and marching_triangle=1 otherwise.

marching_pattern: This boolean flag indicates the marching pattern of edges inside a triangle run. A "0" stands for a march to the left, and a 1 for a march to the right. This field is arithmetically coded.

polygon_edge: This boolean flag indicates whether the base of the current triangle is an edge that should be kept when reconstructing the 3D mesh object. If the base of the current triangle is not to be kept, it is discarded. This field is arithmetically coded.

► **triangle**

coord_bit: This boolean value indicates the value of a geometry bit. This field is arithmetically coded.

coord_heading_bit: This boolean value indicates the value of a heading geometry bit. This field is arithmetically coded.

coord_sign_bit: This boolean value indicates the sign of a geometry sample. This field is arithmetically coded.

coord_trailing_bit: This boolean value indicates the value of a trailing geometry bit. This field is arithmetically coded.

normal_bit: This boolean value indicates the value of a normal bit. This field is arithmetically coded.

normal_heading_bit: This boolean value indicates the value of a heading normal bit. This field is arithmetically coded.

normal_sign_bit: This boolean value indicates the sign of a normal sample. This field is arithmetically coded.

normal_trailing_bit: This boolean value indicates the value of a normal trailing bit. This field is arithmetically coded.

color_bit: This boolean value indicates the value of a color bit. This field is arithmetically coded.

color_heading_bit: This boolean value indicates the value of a heading color bit. This field is arithmetically coded.

color_sign_bit: This boolean value indicates the sign of a color sample. This field is arithmetically coded.

color_trailing_bit: This boolean value indicates the value of a trailing color bit. This field is arithmetically coded.

texCoord_bit: This boolean value indicates the value of a texture bit. This field is arithmetically coded.

texCoord_heading_bit: This boolean value indicates the value of a heading texture bit. This field is arithmetically coded.

texCoord_sign_bit: This boolean value indicates the sign of a texture sample. This field is arithmetically coded.

texCoord_trailing_bit: This boolean value indicates the value of a trailing texture bit. This field is arithmetically coded.

► **3D_Mesh_Object_Forest_Split**

MOFS_start_code: This is a unique 32-bit code that is used for synchronization. The value of this code is always '0000 0000 0011 0010'.

mofs_id: This 8-bit unsigned integer specifies a unique identifier for the forest split component.

pre_smoothing: This boolean value indicates whether the current forest split operation uses a pre-smoothing step to globally predict vertex positions.

pre_smoothing_n: This integer value indicates the number of iterations of the pre-smoothing filter.

pre_smoothing_lambda: This floating point value is the first parameter of the pre-smoothing filter.

pre_smoothing_mu: This floating point value is the second parameter of the pre-smoothing filter.

post_smoothing: This boolean value indicates whether the current forest split operation uses a post-smoothing step to remove quantization artifacts.

post_smoothing_n: This integer value indicates the number of iterations of the post-smoothing filter.

post_smoothing_lambda: This floating point value is the first parameter of the post-smoothing filter.

post_smoothing_mu: This floating point value is the second parameter of the post-smoothing filter.

sharp_edges: This boolean value indicates if data that marks smoothing discontinuity edges, has been included in the bitstream. If sharp_edges==0 no edge is marked as a smoothing discontinuity edge. If smoothing discontinuity edges are marked, then both the pre-smoothing and post-smoothing filters take them into account.

fixed_vertices: This boolean value indicates if data not moving during the smoothing process has been included in the bitstream. If fixed_vertices==0, none of the vertices are allowed to move. If fixed vertices are marked, then both the pre-smoothing and post-smoothing filters take them into account.

edge_mark: This boolean value indicates if a corresponding edge is marked as a smoothing discontinuity edge.

vertex_mark: This boolean value indicates whether a corresponding vertex is fixed.

tree_edge: This boolean value indicates if an edge should be added to the forest built so far.

other_update: This boolean value indicates whether updates for vertex coordinates and properties associated with faces not incident to any tree of the forest, follow in the bitstream.

3D_Mesh_Object

3D_Mesh_Object () {		
3D_MO_start_code	16	uimsbf

3D_Mesh_Object_Header ()		
do {		
3D_Mesh_Object_Layer ()		
} while (nextbits_bytealigned (')==3D_MOL_start_code)		
}		

3D_Mesh_Object_Header

3D_Mesh_Object_Header () {		
Ccw	1	blsbf
Convex	1	blsbf
Solid	1	blsbf
CreaseAngle	6	uimsbf
Coord_header ()		
Normal_header ()		
Color_header ()		
TexCoord_header ()		
cgd_data	1	blsbf
if (cgd_data==1)		
cgd_header ()		
}		

3D_Mesh_Object_Layer

--	--	--

3D_Mesh_Object_Layer () {		
3D_MOL_start_code	16	uimsbf
Mol_id	8	uimsbf
if (cgd_data==1) {		
N_Vertices	24	uimsbf
N_Triangles	24	uimsbf
N_Edges	24	uimsbf
}		
if (mol_id=='00000000')		
3D_Mesh_Object_Base_Layer ()		
else		
3D_Mesh_Object_Forest_Split ()		
}		

3D_Mesh_Object_Base_Layer

3D_Mesh_Object_Base_Layer ()		
do {		
3D_MOBL_start_code	16	uimsbf
mobl_id	8	uimsbf
start_qcoder ()		
do {		
connected_component ()		

last_component		bac
} while (!last_component)		
} while (nextbits_bytealigned (')==3D_MOBL_start_code)		
}		

coord_header

coord_header () {		
coord_binding	2	uimsbf
coord_bbox	1	blsbf
if (coord_bbox) {		
coord_xmin	32	ieeefp
coord_ymin	32	ieeefp
coord_zmin	32	ieeefp
coord_size	32	ieeefp
}		
coord_quant	5	uimsbf
coord_pred_type	2	uimsbf
if (coord_pred_type=='10') {		
coord_nlambda	2	uimsbf
for (i=1;i<coord_nlambda;i++)		
coord_lambda		

	coord_quant+3	
}		
}		

normal_header

normal_header () {		
normal_binding	2	uimsbf
if (normal_binding != '00') {		
normal_bbox	1	blsbf
normal_quant	5	uimsbf
normal_pred_type	2	uimsbf
if (normal_pred_type == '10') {		
normal_nlambda	2	uimsbf
for (i=1;i<normal_nlambda;i++)		
normal_lambda	normal_quant+3	
}		
}		
}		

color_header

color_header () {		
color_binding	2	uimsbf
if (color_binding != '00') {		

color_bbox	1	blsbf
if (color_bbox) {		
color_rmin	32	ieeefp
color_gmin	32	ieeefp
color_bmin	32	ieeefp
color_size	32	ieeefp
}		
color_quant	5	uimsbf
color_pred_type	2	uimsbf
if (color_pred_type=='10') {		
color_nlambda	2	uimsbf
for		
(i=1;i<color_nlambda;i++)		
color_lambda	color_quant+3	
}		
}		
}		

texCoord_header

texCoord_header () {		
texCoord_binding	2	uimsbf
if (texCoord_binding!='00') {		

texCoord_bbox	1	blsbf
if (texCoord_bbox) {		
texCoord_umin	32	ieeefp
texCoord_vmin	32	ieeefp
texCoord_size	32	ieeefp
}		
texCoord_quant	5	uimsbf
texCoord_pred_type	2	uimsbf
if (texCoord_pred_type=='10'){		
texCoord_nlambda	2	uimsbf
for (l=1;j<texCoord_nlambda;i++)		
texCoord_lambda	texCoord_quant+3	
}		
}		
}		

cgd_header

cgd_header () {		
N_Proj_Surface_Spheres	4	uimsbf
if (N_Proj_Surface_Spheres<>0) {		
x_coord_Center_Point	32	ieeefl

y_coord_Center_Point	32	ieeefl
z_coord_Center_Point	32	ieeefl
Normalized_Screen_Distance_Factor	8	uimsbf
for (l=1;i<=N_Proj_Surface_Spheres;i++) {		
Radius	32	ieeefl
Min_Proj_Surface	32	ieeefl
N_Proj_Points	8	uimsbf
for (j=1;j<=N_Proj_Points;j++) {		
Sphere_Point_Coord	11	uimsbf
Proj_Surface	32	ieeefl
}		
}		
}		

connected_component

connected_component () {		
vertex_graph ()		
triangle_tree ()		
triangle_data ()		
}		

vertex_graph

--	--	--

vertex_graph () {		
vg_simple	0-16	bac
depth=0		
skip_last=0		
openloops=0		
do {		
do {		
if (!skip_last) {		
vg_last	0-16	bac
if		
(openloops>0) {		
vg_forward_run	0-	bac
if (!vg_forward_run) {		
openloop-		
if (openloops>0)		
vg_loop_index	0-	bac
break		
}		
}		

}		
vg_run_length	0-	uac
vg_leaf	0-16	bac
if		
(vg_leaf&&!vg_simple) {		
vg_loop	0-16	bac
if		
(vg_loop)		
openloops++		
}		
} while (0)		
if (vg_leaf==(vg_last&!skip_last))		
if		
(vg_last&!skip_last)		
depth--		
else		
depth++		
skip_last=!vg_leaf		
} while (depth >= 0)		
}		

triangle_tree

triangle_tree () {		
depth = 0		
ntriangles = 0		
do {		
tt_run_length	0-16	bac
ntriangles += tt_run_length		
tt_leaf	0-16	bac
if (tt_leaf)		
depth--		
else		
depth++		
} while (depth >= 0)		
}		

triangle_data

triangle_data () {		
triangulated	0-16	bac
root_triangle ()		
for (i=1; i<ntriangles;i++)		
triangle ()		
}		

root_triangle

root_triangle () {		
if (marching_triangle)		
marching_pattern	0-16	bac
root_coord ()		
root_normal ()		
root_color ()		
root_texCoord ()		
}		

root_coord () {		
root_coord_sample ()		
coord_sample ()		
coord_sample ()		
}		

root_normal () {		
if (normal_binding != '00') {		
root_normal_sample ()		
if (normal_binding != '10') {		
normal_sample ()		
normal_sample ()		

}		
}		
}		

root_color () {		
if (color_binding != '00') {		
root_color_sample ()		
if (color_binding != '10') {		
color_sample ()		
color_sample ()		
}		
}		
}		

root_texCoord () {		
if (texCoord_binding != '00') {		
root_texCoord_sample ()		
texCoord_sample ()		
texCoord_sample ()		
}		

}		
---	--	--

triangle

triangle () {		
if (marching_triangle)		
marching_pattern	0-16	bac
if (!triangulated)		
polygon_edge	0-16	bac
coord ()		
normal ()		
color ()		
texCoord ()		
}		

coord () {		
if (!visited)		
coord_sample ()		
}		

normal () {		
if (normal_binding == '01') {		
if (!visited)		

normal_sample ()		
}		
else if (normal_binding == '10') {		
if (triangulated polygon_edge)		
normal_sample ()		
}		
else if (normal_binding == '11') {		
if (triangulated polygon_edge) {		
normal_sample ()		
normal_sample ()		
}		
normal_sample ()		
}		
}		

color () {		
if (color_binding == '01') {		
if (!visited)		
color_sample ()		
}		
else if (color_binding == '10') {		
if (triangulated polygon_edge)		

color_sample ()		
}		
else if (color_binding == '11') {		
if (triangulated polygon_edge) {		
color_sample ()		
color_sample ()		
}		
color_sample ()		
}		
}		

texCoord () {		
if (texCoord_binding == '01') {		
if (!visited)		
texCoord_sample ()		
}		
else if (texCoord_binding == '11') {		
if (triangulated polygon_edge) {		
texCoord_sample ()		
texCoord_sample ()		

}		
texCoord_sample ()		
}		
}		

coord_root_sample () {		
for (i=0; i<3; i++)		
for (j=0; j<coord_quant; j++)		
coord_bit	0-1	bac
}		

normal_root_sample () {		
for (i=0; i<1; i++)		
for (j=0; j<normal_quant; j++)		
normal_bit	0-1	bac
}		

color_root_sample () {		
for (i=0; i<3; i++)		
for (j=0; j<color_quant; j++)		
color_bit	0-1	bac
}		

texCoord_root_sample () {		
for (i=0; i<2; i++)		
for (j=0; j<texCoord_quant; j++)		
texCoord_bit	0-1	bac
}		

coord_sample () {		
for (i=0; i<3; i++) {		
j=0		
do {		
coord_leading_bit	0-16	bac
j++		
} while (j<coord_quant && !coord_leading_bit)		
if (coord_leading_bit) {		
coord_sign_bit	0-1	bac
do {		
coord_trailing_bit		
} while (j<coord_quant)		
}		

}		
}		

normal_sample () {		
for (i=0; i<1; i++) {		
j=0		
do {		
normal_leading_bit	0-16	bac
j++		
(j<normal_quant && !normal_leading_bit) } while		
if (normal_leading_bit) {		
normal_sign_bit	0-1	bac
do {		
normal_trailing_bit		
} while (j<normal_quant)		
}		
}		
}		

color_sample () {		
for (i=0; i<3; i++) {		
j=0		
do {		
color_leading_bit	0-16	bac
j++		
} while (j<color_quant && !color_leading_bit)		
if (color_leading_bit) {		
color_sign_bit	0-1	bac
do {		
color_trailing_bit		
} while (j<color_quant)		
}		
}		
}		

texCoord_sample () {		
for (i=0; i<2; i++) {		
j=0		
do {		

texCoord_leading_bit	0-16	bac
j++		
while (j<texCoord_quant && !texCoord_leading_bit)		
if (texCoord_leading_bit) {		
texCoord_sign_bit	0-1	bac
do {		
texCoord_trailing_bit		
} while (j<texCoord_quant)		
}		
}		
}		

3D_Mesh_Object_Forest_Split

3D_Mesh_Object_Forest_Split () {		
do {		
3D_MOFS_start_code	16	uimbsf
mofs_id	8	uimbsf
pre_smoothing	1	blsbf
if(pre_smoothing)		

pre_smoothing_parameters ()	1	blsbf
post_smoothing		
if(post_smoothing)		
post_smoothing parameters()		
start_qcoder()		
sharp_edges	1	blsbf
if(sharp_edges)		
edge_marks()		
fixed_vertices	1	blsbf
if(fixed_vertices)		
vertex_marks()		
for each connected component {		
fs_pre_update()		
fs_post_update()		
}		
} while (nextbits_bytealigned()==3D_MOFS_start_code)		
}		

pre_smoothing_parameters() {		
pre_smoothing_n	8	nimsbf

pre_smoothing_lambda	32	ieefl
pre_smoothing_mu	32	ieefl
}		

post_smoothing_parameters() {		
post_smoothing_n	8	nimsbf
post_smoothing_lambda	32	ieefl
post_smoothing_mu	32	ieefl
}		

edge_marks () {		
for each edge		
edge_mark	}	bac
}		

vertex_marks () {		
for each vertex		
vertex_mark	}	bac
}		

fs_pre_updata() {		
forest()		
for each tree in forest {		

triangle_tree()		
for each vertex in tree loop		
visted = 1		
triangle_data()		
}		
}		

forest () {		
for each edge		
if (creates no loop in forest)		
tree_edge	1	bac
}		

fs_post_updata() {		
for each tree in forest {		
for each vertex in tree loop		
visted = 0		
tree_loop_property_update()		
}		
other_update	1	blsf
if(other_updata)		
other_property_updata()		

}		
---	--	--

tree_loop_property_update () {		
for each triangle incident to tree {		
coord_update()		
normal_update()		
color_update()		
texCoord_update()		
}		
}		

other_property_update () {		
for each triangle no incident to any tree in forest {		
coord_update()		
normal_update()		
color_update()		
texCoord_update()		
}		
}		

coord_update() {		
if (!visited)		

coord_sample()		

normal_updata() {		
if (normal_binding=='01') {		
if (!visited)		
normal_sample()		
}		
else if (normal_binding == '10') {		
normal_sample()		
}		
else if (normal_binding == '11') {		
if (1 st corner adjacent to tree)		
normal_sample()		
if (2 nd corner adjacent to tree)		
normal_sample()		
if (3 rd corner adjacent to tree)		
normal_sample()		
}		
}		

color_updata() {		

if (color_binding=='01') {		
if (!visited)		
color_sample()		
}		
else if (color_binding == '10') {		
color_sample()		
}		
else if (color_binding == '11') {		
if (1 st corner adjacent to tree)		
color_sample()		
if (2 nd corner adjacent to tree)		
color_sample()		
if (3 rd corner adjacent to tree)		
color_sample()		
}		
}		

texCoord_updata() {		
if (texCoord_binding=='01') {		
if (!visited)		
texCoord_sample()		
}		

else if (texCoord_binding == '10') {		
texCoord_sample()		
}		
else if (texCoord_binding == '11') {		
if (1 st corner adjacent to tree)		
texCoord_sample()		
if (2 nd corner adjacent to tree)		
texCoord_sample()		
if (3 rd corner adjacent to tree)		
texCoord_sample()		
}		
}		

[Effect of the Invention]

As described above, in a progressive 3-D mesh information coding/decoding method and apparatus according to the present invention, the apparatus has a data structure in which data is dealt with as mesh components (MCOM), so that division by components is possible even on a compressed bit stream. Thus, a decoding portion can easily reproduce components as soon as decoding by components is completed.

Also, progressive image reproduction and capability of coping with transmission errors is better reinforced than in conventional 3-D mesh information coding methods.

Furthermore, when a model is divided into mesh object layers (MOLs) or mesh components (MCOMs), the MOLs or MCOMs can be independently coded and decoded. Such a structure is simple, and can be realized so that redundant information can be easily removed as necessary.

What is claimed is:

1. A progressive 3-D mesh information coding method comprising the steps of:

- (a) dividing a 3-D mesh into a plurality of mesh components;
- (b) coding each of the plurality of mesh components; and
- (c) multiplexing the plurality of coded mesh components into a compressed bit stream and transmitting the compressed bit stream.

2. The progressive 3-D mesh information coding method as claimed in claim 1, wherein each of the plurality of mesh components includes at least connectivity information, geometry information and photometry information which are necessary to reconstruct the coded mesh components themselves.

3. The progressive 3-D mesh information coding method as claimed in claim 1, wherein the step (a) comprises the substeps of:

- (a1) extracting one or more mesh object layeres from a 3-D mesh; and
- (a2) dividing one or more mesh object layeres each into a plurality of mesh components.

4. The progressive 3-D mesh information coding method as claimed in claim 1, wherein in the step (b), each of the plurality of mesh components is coded, and information generated while a mesh component is coded is reused in the process for coding a mesh component which has not yet been coded.

5. A progressive 3-D mesh information decoding method comprising the steps of:

- (a) dividing a transmitted bit stream into a plurality of coded mesh components;
- (b) decoding each of the plurality of coded mesh components; and
- (c) reconstructing a 3-D mesh by synthesizing the plurality of decoded mesh components.

6. The progressive 3-D mesh information decoding method as claimed in claim 5, wherein the step (a) comprises the substeps of:

(a1) classifying the transmitted bit stream into one or more decoded mesh object layeres; and

(a2) dividing each of the one or more decoded mesh object layeres into a plurality of mesh components.

7. The progressive 3-D mesh information decoding method as claimed in claim 5, wherein in the step (b), each of the plurality of coded mesh components is decoded, and information generated while a mesh component is decoded is reused in the process for decoding a mesh component which has not yet been decoded.

8. A progressive 3-D mesh information coding/decoding method comprising the steps of:

(a) extracting one or more independent mesh object layers from a 3-D mesh;

(b) independently coding and transmitting the one or more mesh object layeres; and

(c) obtaining one or more independent mesh object layeres by decoding one or more of the independently coded and transmitted mesh object layeres.

9. The progressive 3-D mesh information coding/decoding method as claimed in claim 8, further comprising the step of (d) reconstructing the original 3-D mesh by collecting the independent mesh object layeres and removing redundant information, after step (c).

10. A progressive 3-D mesh information coding/decoding method comprising the steps of:

(a) extracting one or more mesh object layers from a 3-D mesh and dividing each of the mesh object layers into a plurality of independent mesh components;

(b) independently coding and transmitting the plurality of mesh components for each of the one or more mesh object layers; and

(c) obtaining a plurality of independent mesh components by decoding the plurality of independently coded and transmitted mesh components.

11. The progressive 3-D mesh information coding/decoding method as claimed in claim 10, further comprising the step of (d) reconstructing the original 3-D mesh by collecting the independent mesh components and removing redundant information between adjacent mesh components, after step (c).

12. A progressive 3-D mesh information coding apparatus comprising:
a 3-D data analyzer for receiving a 3-D mesh and reconstructing the input 3-D mesh into a plurality of mesh components;
a plurality of component coders for coding the plurality of mesh components;
and
a multiplexer for multiplexing the plurality of coded mesh components into a compressed bit stream.

13. The progressive 3-D mesh information coding apparatus as claimed in claim 12, wherein the 3-D data analyzer comprises:
a 3-D mesh object layer analyzer for dividing the input 3-D mesh into one or more mesh object layeres; and
a plurality of mesh component analyzers for again dividing each of one or more mesh object layeres into a plurality of mesh components.

14. The progressive 3-D mesh information coding apparatus as claimed in claim 12, wherein when the plurality of component coders code the plurality of mesh components, a component coder which has not yet performed coding performs coding using coding information generated in a component coder which has already performed coding.

15. A progressive 3-D mesh information decoding apparatus for progressively decoding a bit stream decoded by and transmitted from a progressive 3-D mesh information coding apparatus, comprising:

a demultiplexer for dividing the transmitted bit stream into a plurality of coded mesh components;

a plurality of component decoders for decoding the plurality of coded mesh components; and

a 3-D data synthesizer for synthesizing the plurality of decoded mesh components to reconstruct a 3-D mesh.

16. The progressive 3-D mesh information decoding apparatus as claimed in claim 15, wherein when the plurality of component decoders decode the plurality of mesh components, a component decoder which has not yet performed decoding performs decoding using decoding information generated in a component decoder which has already performed decoding.

17. A progressive 3-D mesh information coding/decoding apparatus comprising:

a 3-D mesh object layer analyzer for receiving a 3-D mesh and dividing an input 3-D mesh into one or more independent mesh object layers;

one or more mesh object layer coders for independently coding and transmitting one or more mesh object layers; and

one or more mesh object layer decoders for decoding one or more independent mesh object layers which are independently coded and transmitted, to obtain one or more independent mesh object layers.

18. An independent and progressive 3-D mesh information coding/decoding apparatus as claimed in claim 17, further comprising a 3-D mesh object layer synthesizer for synthesizing one or more independent mesh object layers and removing redundant information to reconstruct the original 3-D mesh.

19. A progressive 3-D mesh information coding/decoding apparatus comprising:

a 3-D mesh object layer analyzer for receiving a 3-D mesh, dividing an input 3-D mesh into one or more mesh object layers, and again dividing each mesh object layer into a plurality of independent mesh components;

a plurality of mesh component coders for independently coding and transmitting the plurality of mesh object layers; and

a plurality of mesh component decoders for decoding the plurality of mesh components which are independently coded and transmitted, to obtain a plurality of independent mesh components.

20. An independent and progressive 3-D mesh information coding/decoding apparatus as claimed in claim 19, further comprising a 3-D step data synthesizer for synthesizing the plurality of independent mesh components and removing redundant information between adjacent mesh components to reconstruct the original 3-D mesh.

FIG. 1

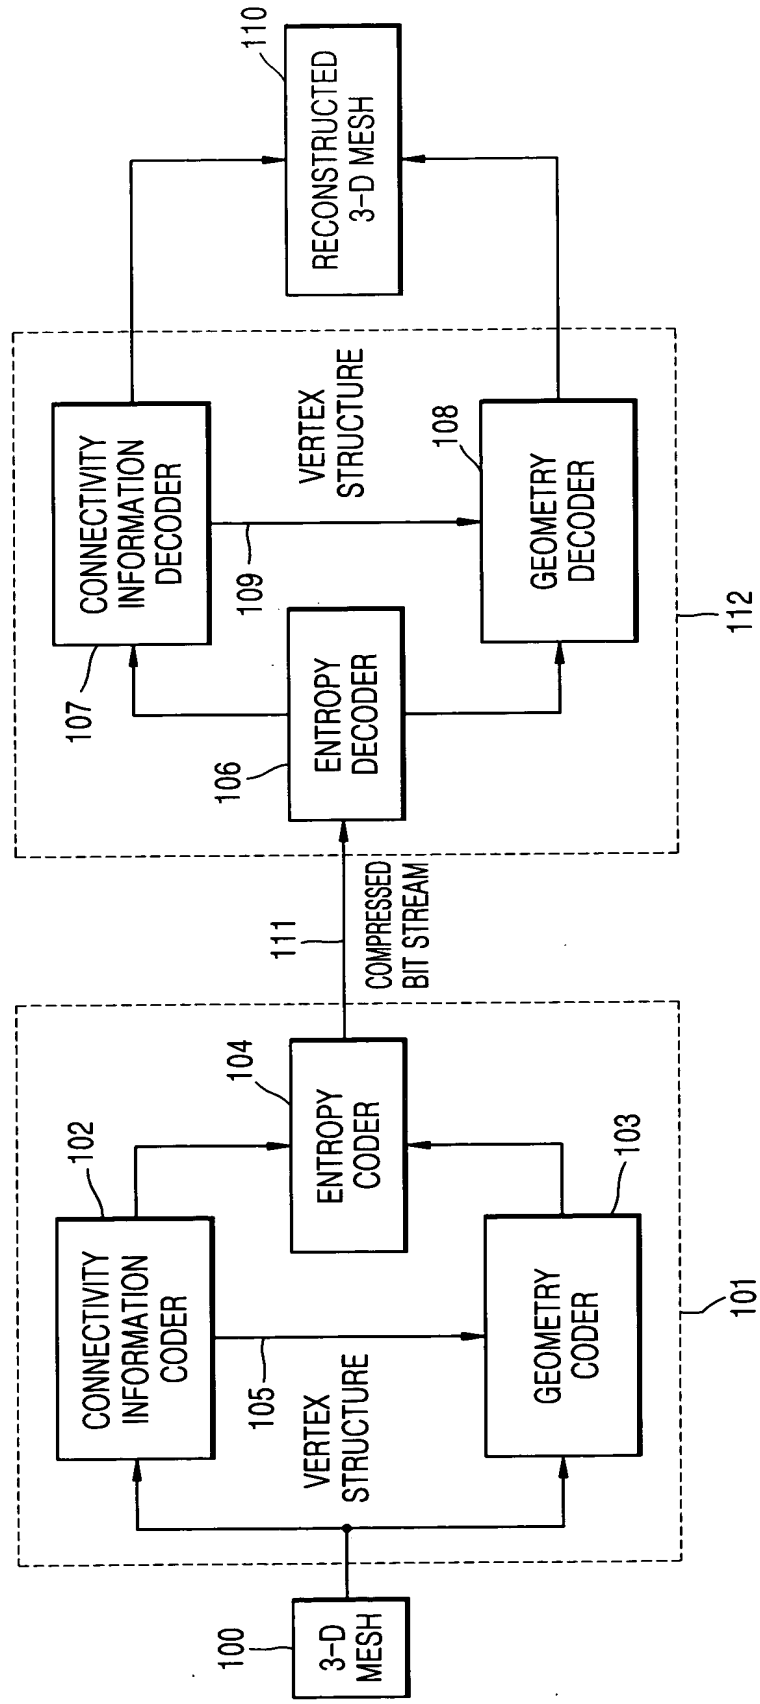


FIG. 2

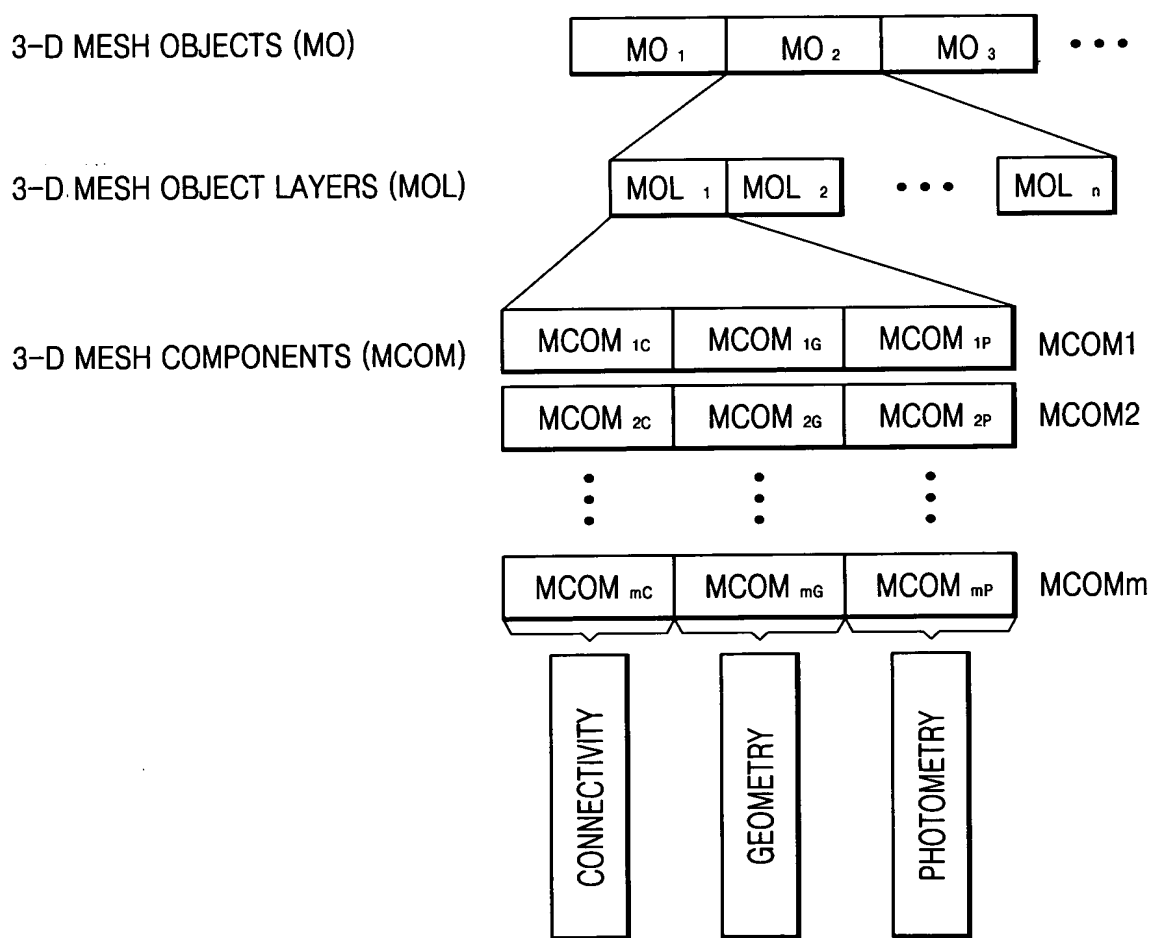


FIG. 3

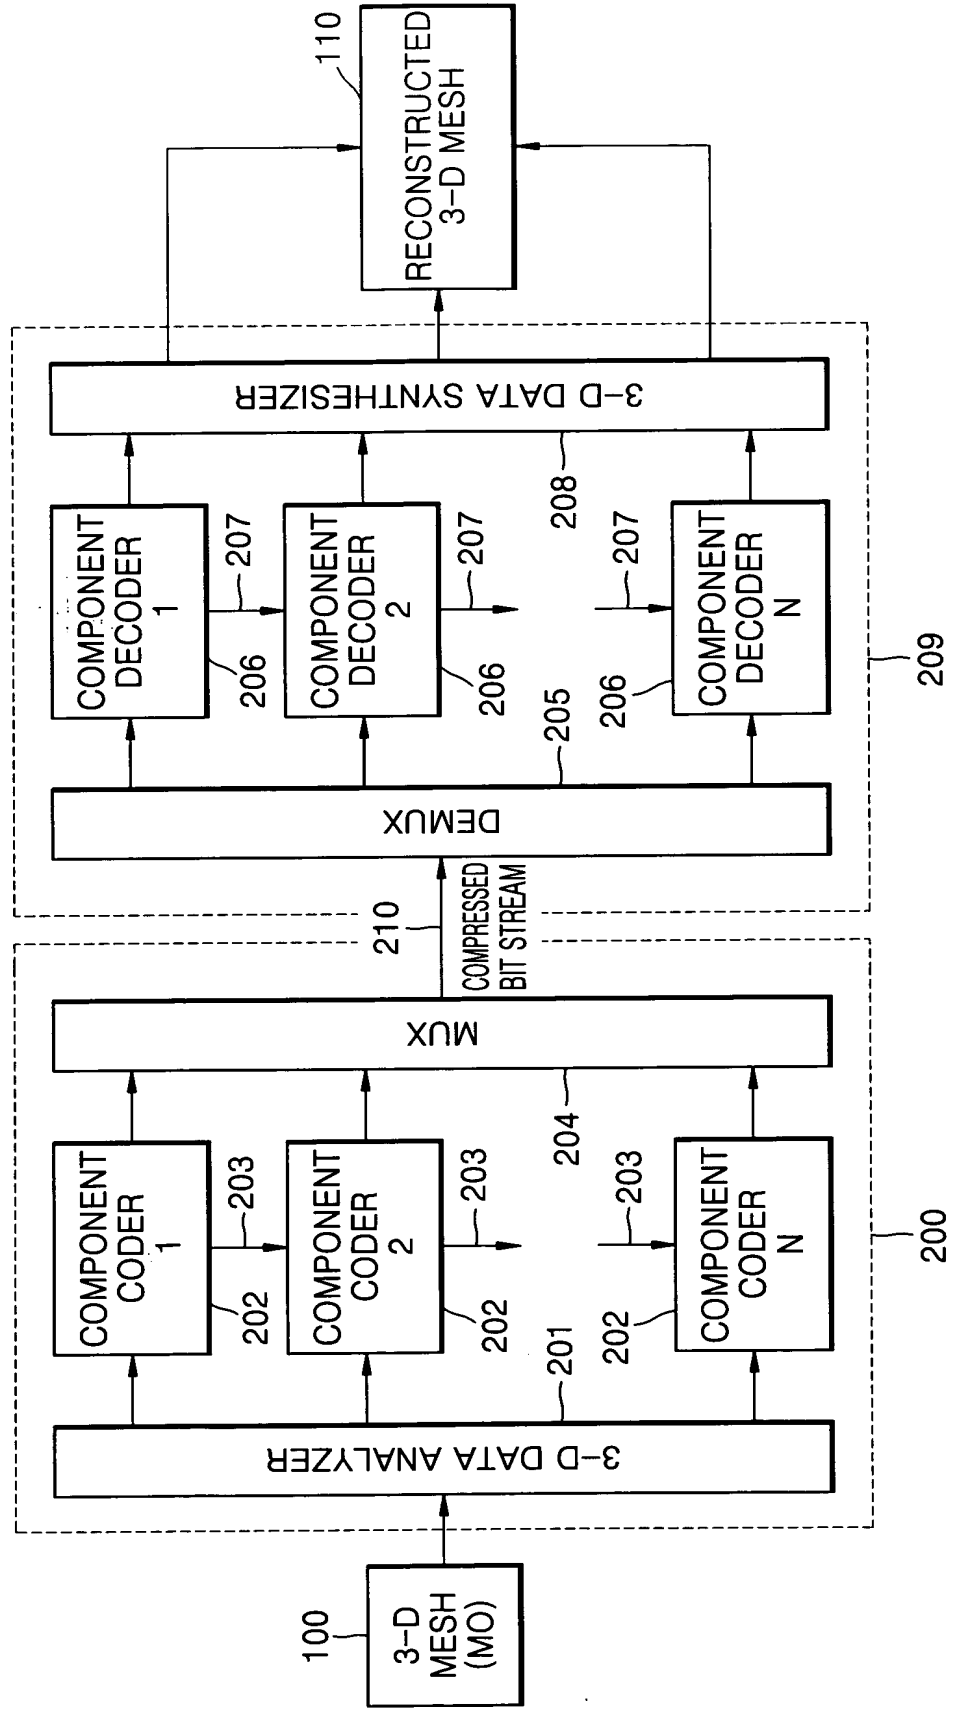


FIG. 4

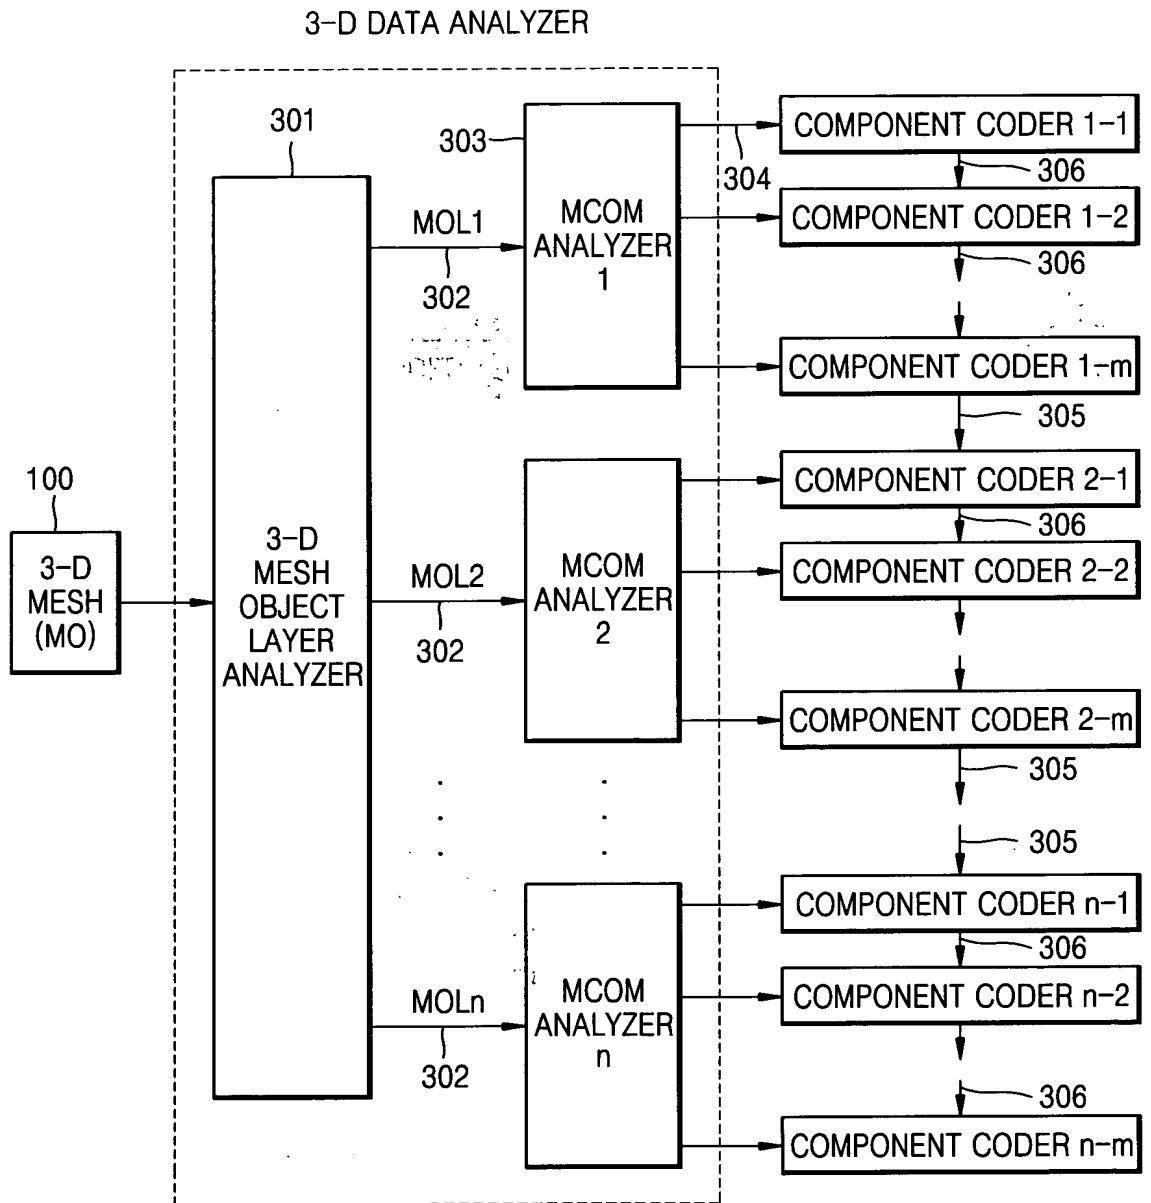


FIG. 5

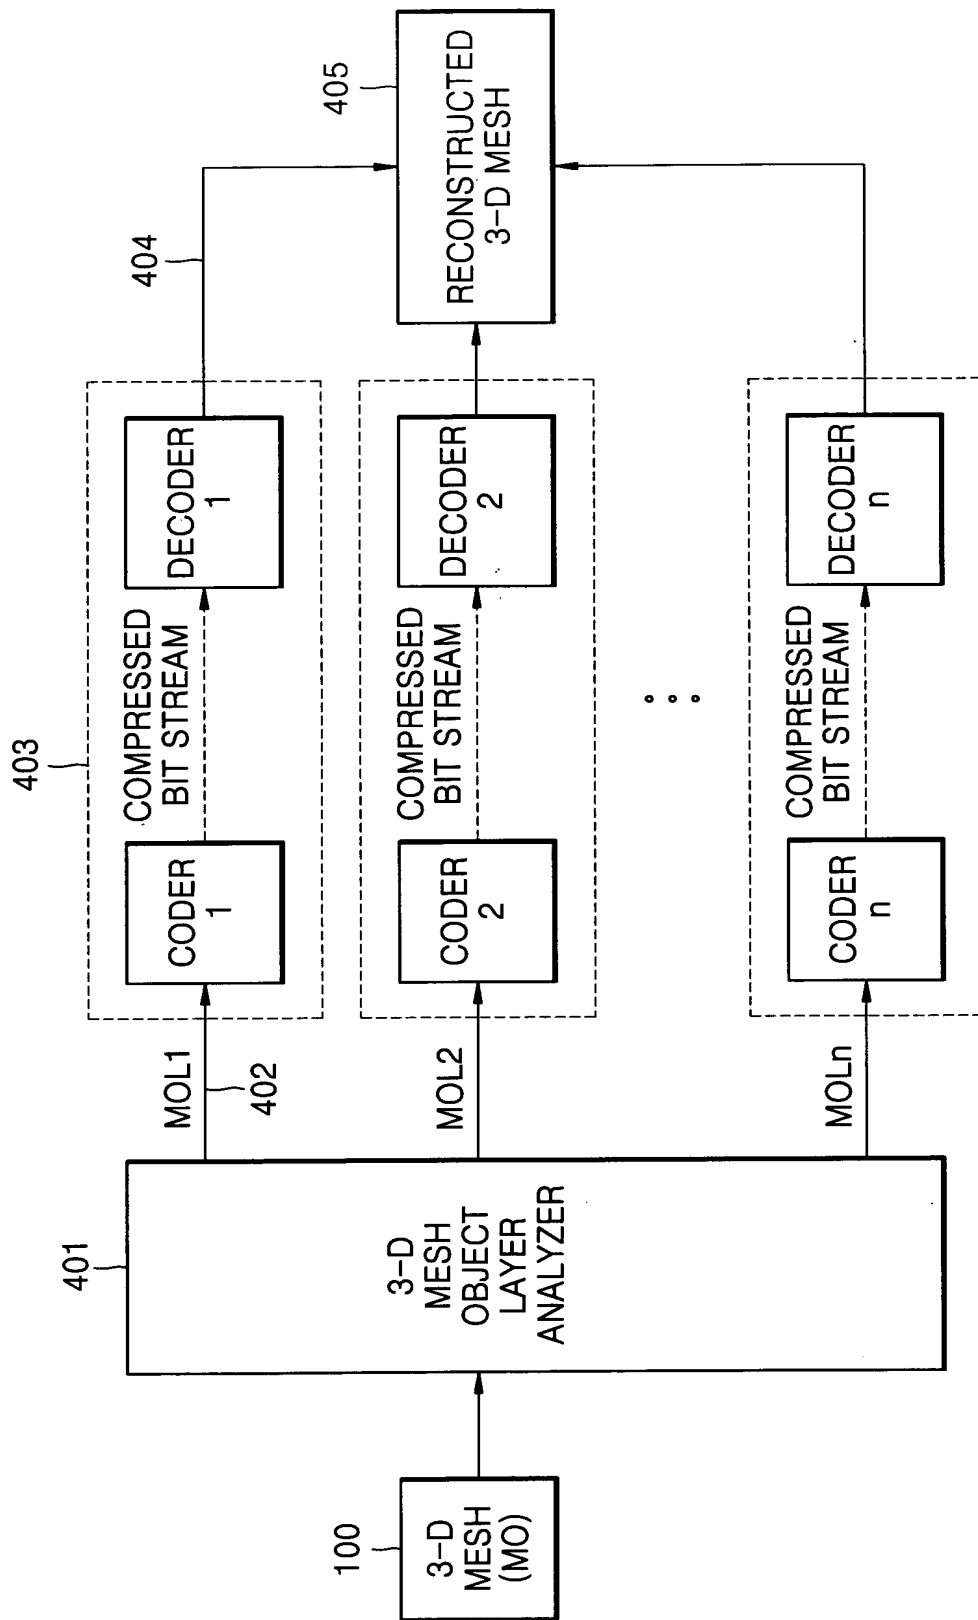


FIG. 6

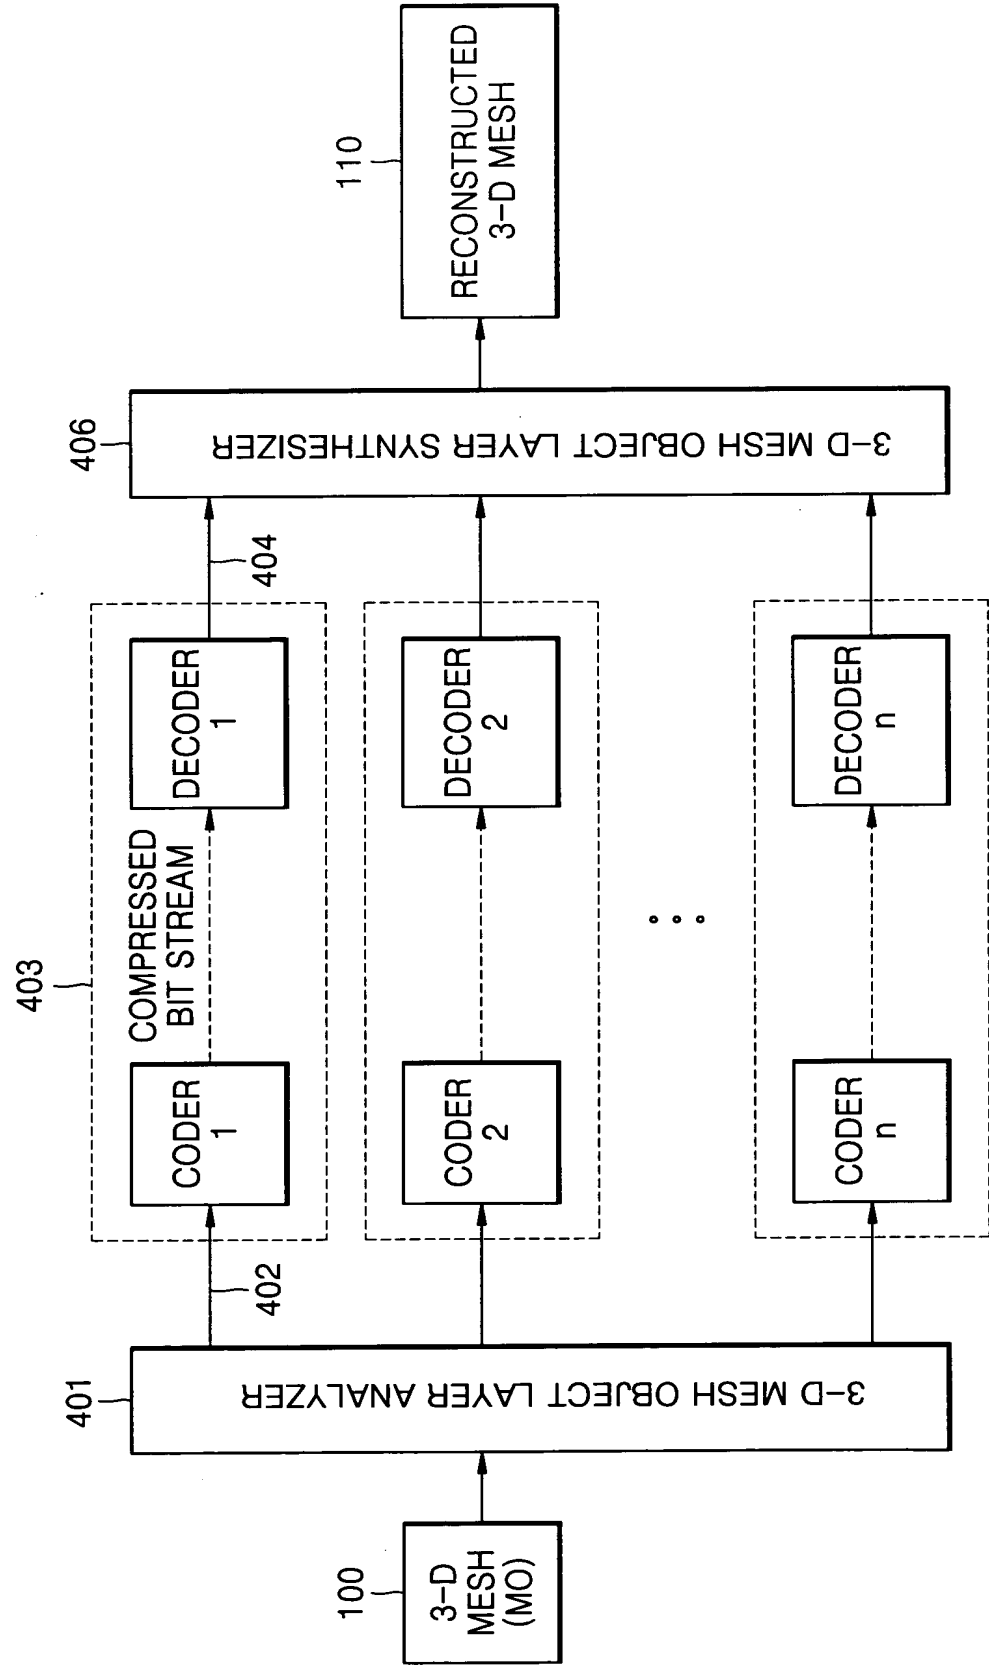


FIG. 7

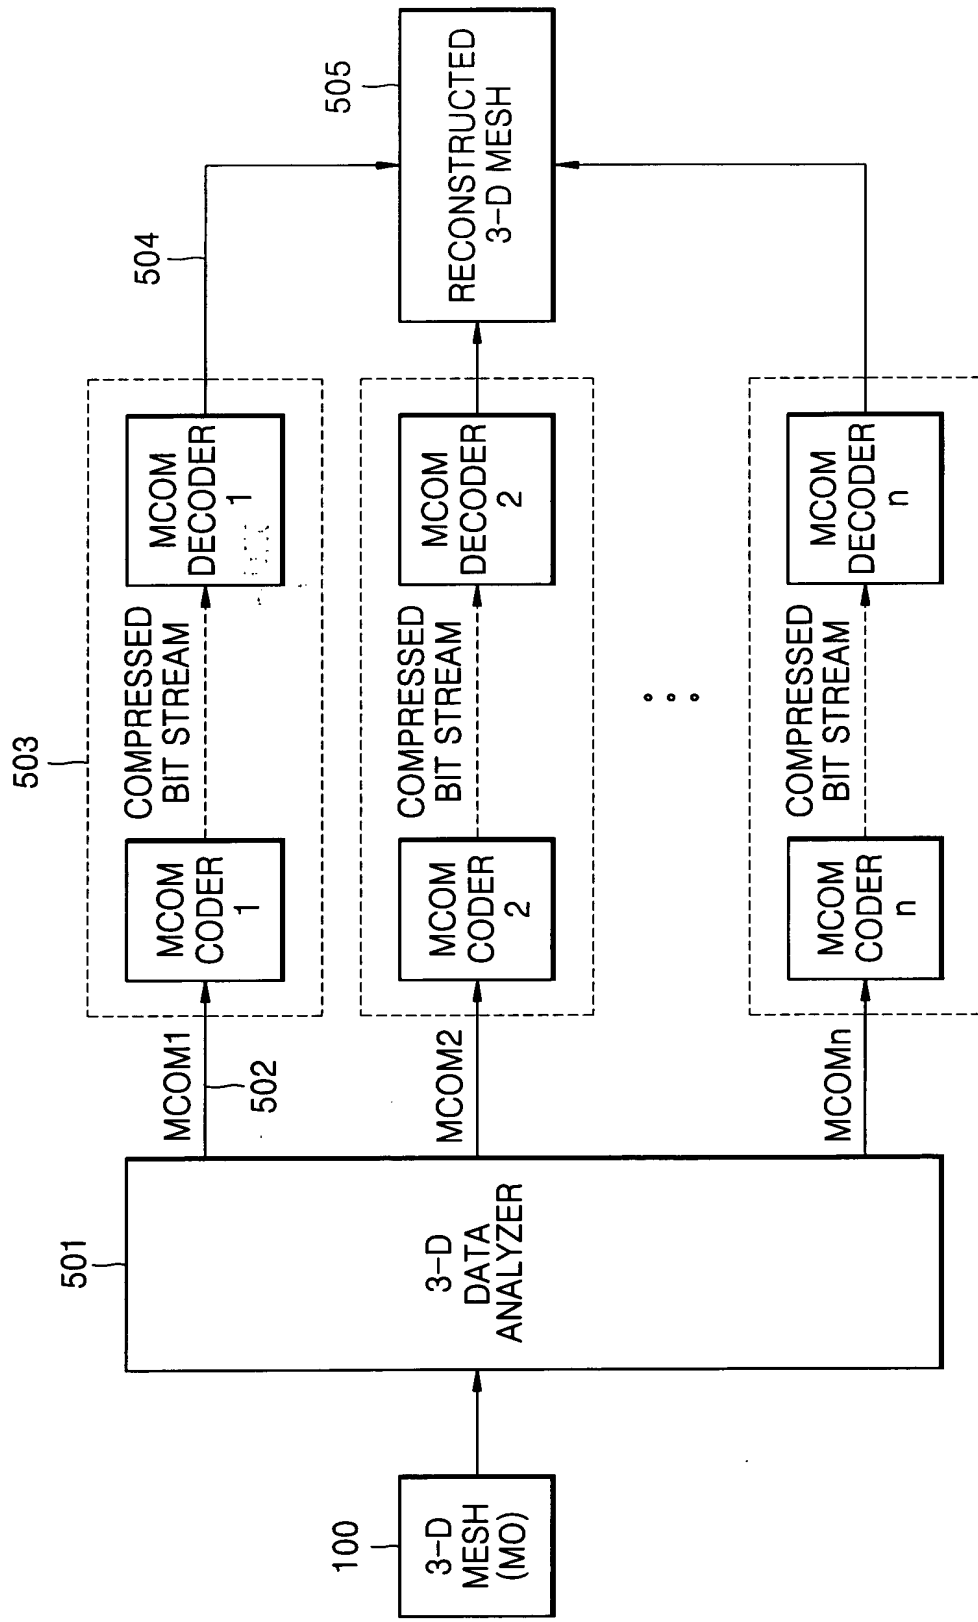


FIG. 8

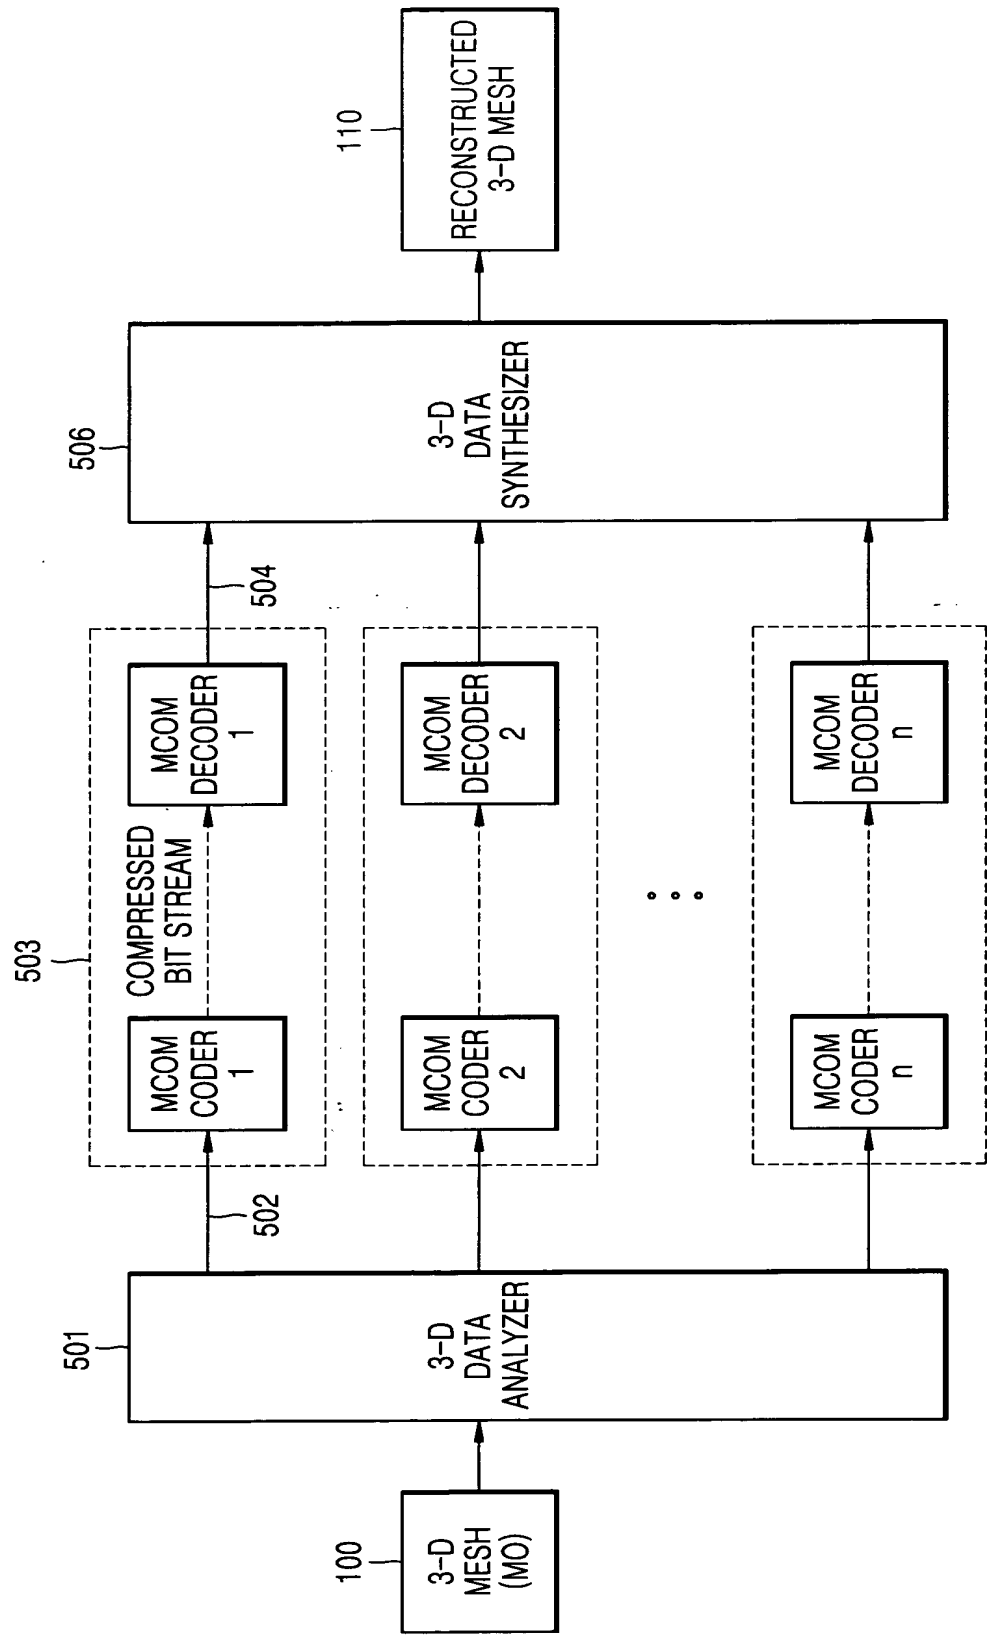


FIG. 9

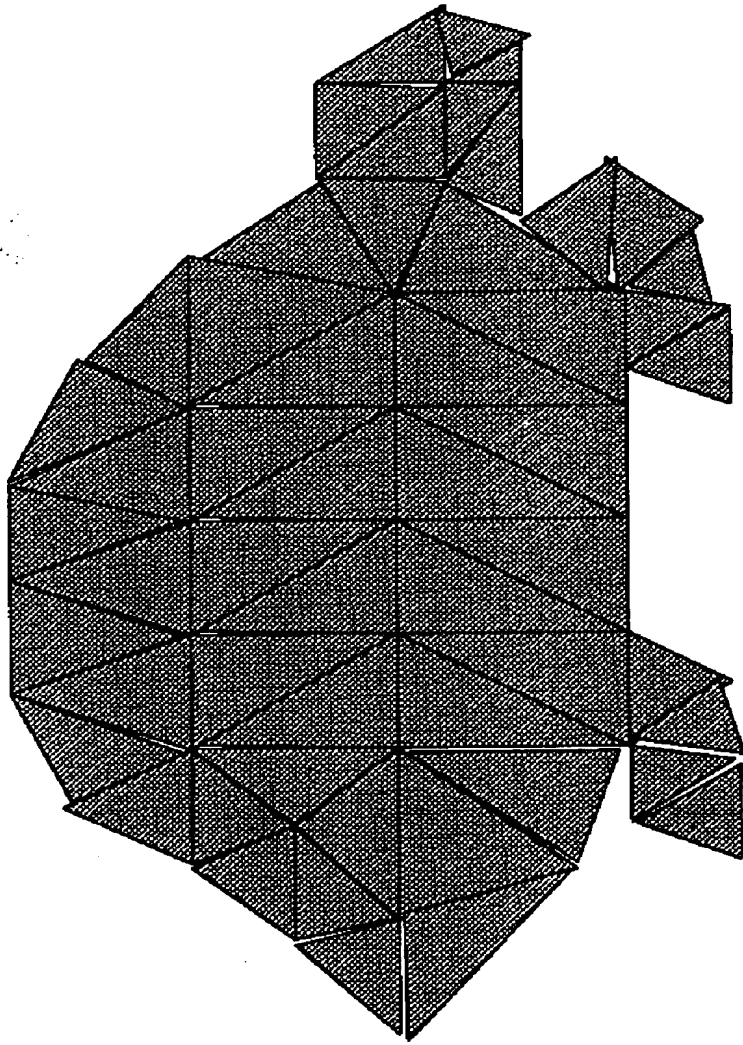


FIG. 10

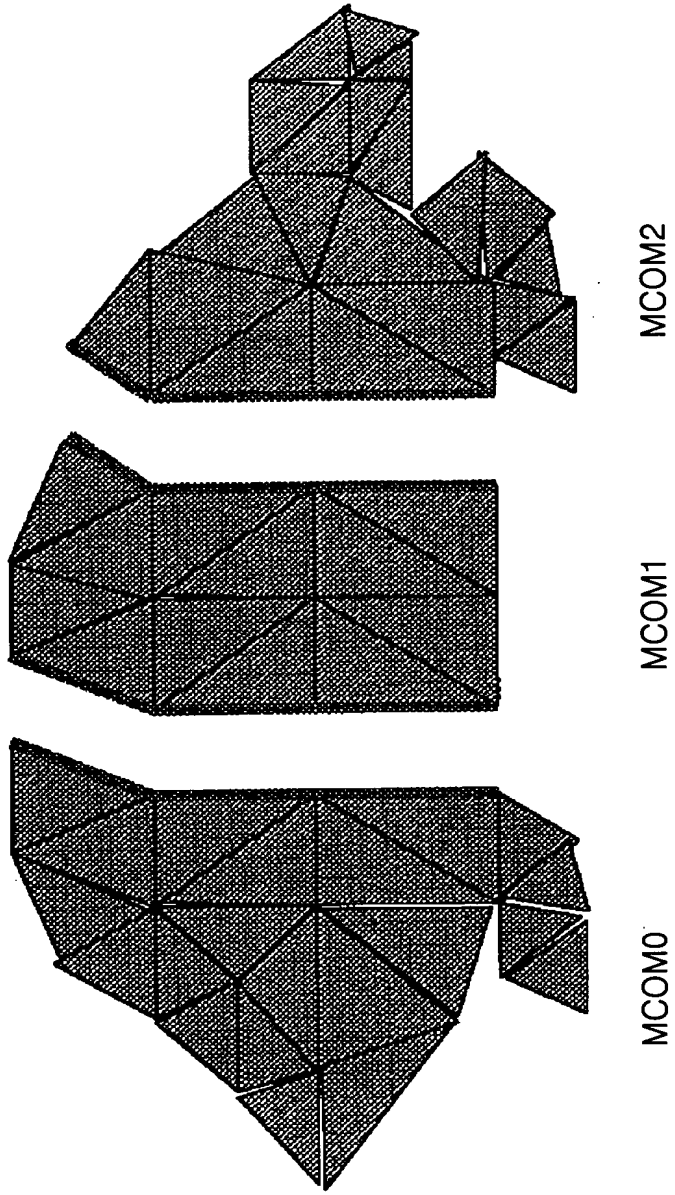


FIG. 11



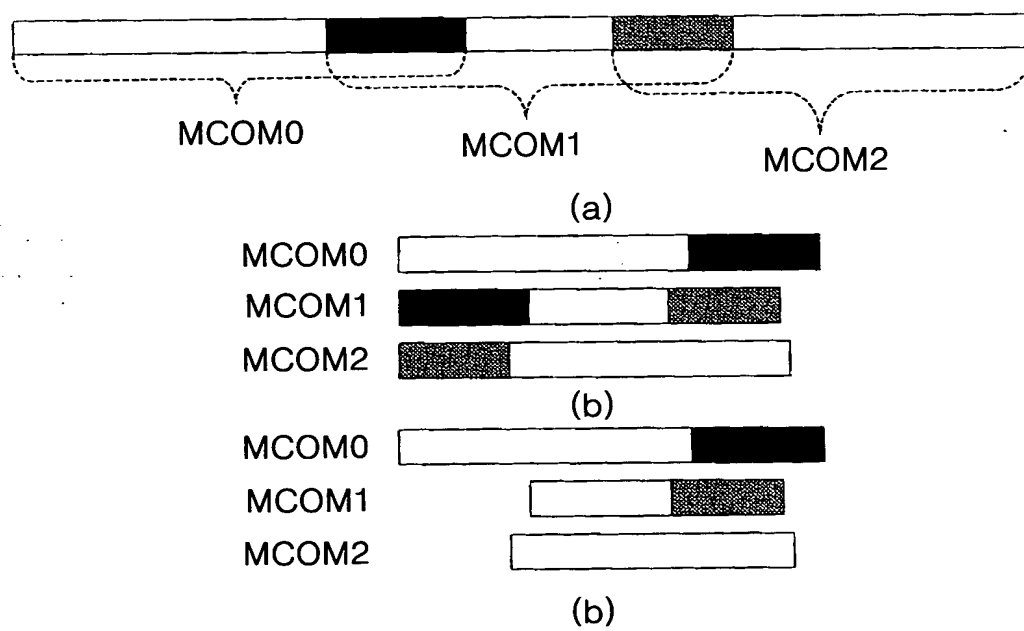



FIG. 12

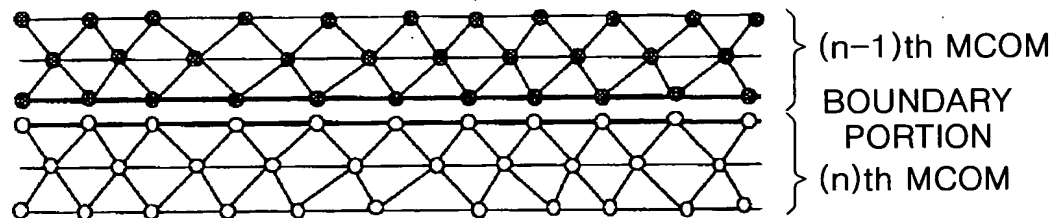

(a)

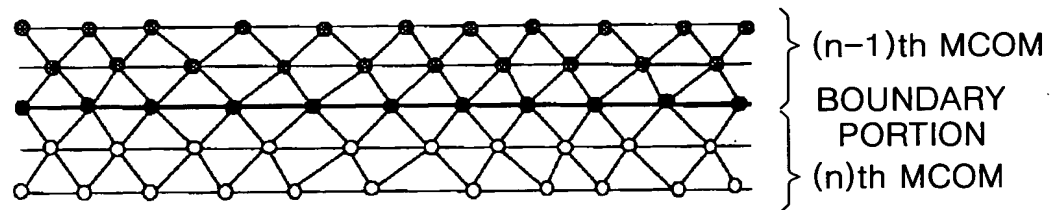

(b)

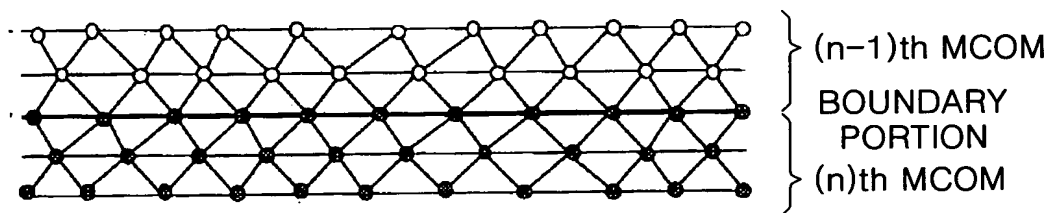

(c)